

## Hose tail coupler



### For hose ID (mm)

10

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

3686 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

11 mm

### Temperature

-15°C to +70°C


### Construction

Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

Description	
Reference	For hose ID (mm)
ISI 111809EB	9
ISI 111810EB	10
ISI 111813EB	13
ISI 111816EB	16
ISI 111819EB	19

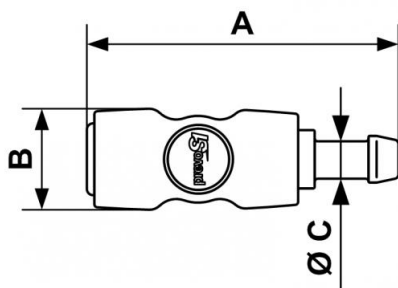

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 111809EB</b>	136	37	9
<b>ISI 111810EB</b>	114	37	10
<b>ISI 111813EB</b>	120	37	13
<b>ISI 111816EB</b>	120	37	16
<b>ISI 111819EB</b>	145	37	19