

Parallel male thread coupler



BSPB male thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

3530 l/min ($\Delta P = 0,6$ bar)

ID Passage

10,4 mm

Temperature

-15°C to +70°C


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description	
Reference	BSPB male thread
ESI 111152EB	G 3/8
ESI 111153EB	G 1/2
ESI 111154EB	G 3/4

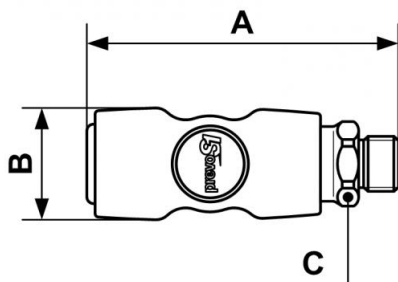

Dimensions

Reference	A mm	B mm	C mm
ESI 111152EB	99	37	26
ESI 111153EB	101	37	26
ESI 111154EB	106	37	32