

## Parallel male thread coupler



### BSPB male thread

G 3/8

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

3530 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

10,4 mm

### Temperature

-15°C to +70°C


### Construction

Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

Description	
Reference	BSPB male thread
<b>ESI 111152EB</b>	G 3/8
<b>ESI 111153EB</b>	G 1/2
<b>ESI 111154EB</b>	G 3/4

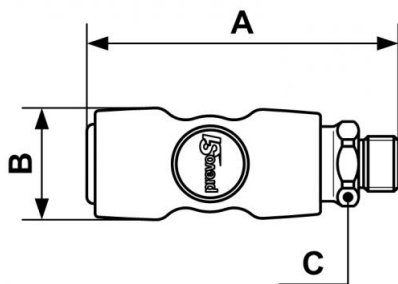

### Dimensions

Reference	A mm	B mm	C mm
<b>ESI 111152EB</b>	99	37	26
<b>ESI 111153EB</b>	101	37	26
<b>ESI 111154EB</b>	106	37	32