

Parallel female thread coupler



BSPP female thread

G 3/8

Profile

Truflate

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2987 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description		
Reference	BSPF female thread	NPT female thread
USI 111102EB	G 3/8	3/8 NPT
USI 111103EB	G 1/2	1/2 NPT
USI 111104EB	G 3/4	3/4 NPT
USI 111202EB		
USI 111203EB		
USI 111204EB		

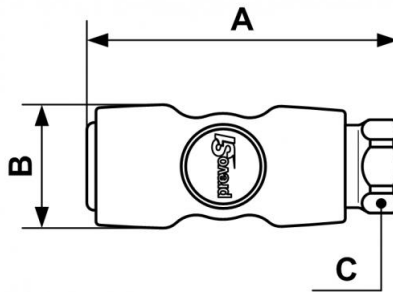

Dimensions

Reference	A mm	B mm	C mm
USI 111102EB	102	37	26
USI 111103EB	103	37	26
USI 111104EB	111	37	30
USI 111202EB	100	37	26
USI 111203EB	102	37	26
USI 111204EB	108	37	30