

## Parallel female thread coupler



### BSPP female thread

G 3/8

### Profile

Truflate

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

2987 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

11 mm

### Temperature

-15°C to +70°C


### Construction

Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

Description		
Reference	BSPF female thread	NPT female thread
<b>USI 111102EB</b>	G 3/8	3/8 NPT
<b>USI 111103EB</b>	G 1/2	1/2 NPT
<b>USI 111104EB</b>	G 3/4	3/4 NPT
<b>USI 111202EB</b>		
<b>USI 111203EB</b>		
<b>USI 111204EB</b>		

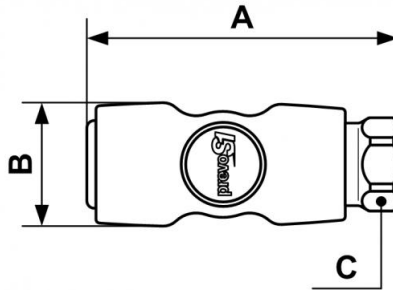

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 111102EB</b>	102	37	26
<b>USI 111103EB</b>	103	37	26
<b>USI 111104EB</b>	111	37	30
<b>USI 111202EB</b>	100	37	26
<b>USI 111203EB</b>	102	37	26
<b>USI 111204EB</b>	108	37	30