

## Parallel male thread coupler



### BSPB male thread

G 3/8

### Profile

Truflate

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

2987 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

11 mm

### Temperature

-15°C to +70°C

### Construction


Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

## Description

Reference	BSPB male thread	NPT male thread
<b>USI 111152EB</b>	G 3/8	3/8 NPT
<b>USI 111153EB</b>	G 1/2	1/2 NPT
<b>USI 111154EB</b>	G 3/4	3/4 NPT
<b>USI 111252EB</b>		
<b>USI 111253EB</b>		
<b>USI 111254EB</b>		

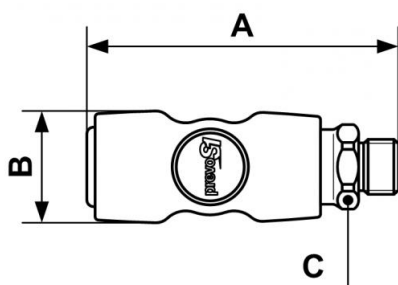

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 111152EB</b>	108	37	26
<b>USI 111153EB</b>	110	37	26
<b>USI 111154EB</b>	115	37	32
<b>USI 111252EB</b>	112	37	26
<b>USI 111253EB</b>	116	37	26
<b>USI 111254EB</b>	118	37	30