

Parallel male thread coupler



NPT male thread

3/8 NPT

Profile

Truflate

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2987 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description		
Reference	BSP male thread	NPT male thread
USI 111152EB	G 3/8	3/8 NPT
USI 111153EB	G 1/2	1/2 NPT
USI 111154EB	G 3/4	3/4 NPT
USI 111252EB		
USI 111253EB		
USI 111254EB		

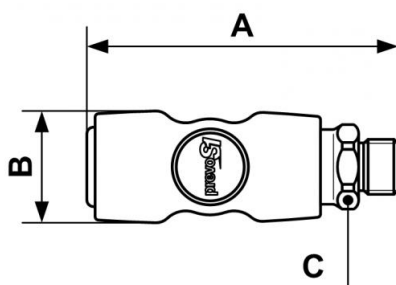

Dimensions

Reference	A mm	B mm	C mm
USI 111152EB	108	37	26
USI 111153EB	110	37	26
USI 111154EB	115	37	32
USI 111252EB	112	37	26
USI 111253EB	116	37	26
USI 111254EB	118	37	30