

Thread swivel coupler



BSPF female thread

G 1/4

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

1 820 l/min ($\Delta P = 0,6$ bar)

ID Passage

7,4 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch

Description

Reference


BSPF female thread

ESI 071101SW

G 1/4

ESI 071102SW

G 3/8

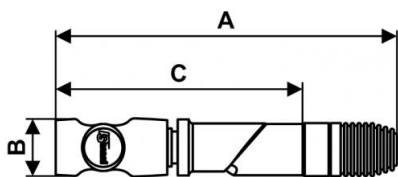

Dimensions

Reference	A mm	B mm	C mm
ESI 071101SW	176.3	32.25	128.6
ESI 071102SW	176.3	32.25	128.6