


thread swivel coupler



<p><u>BSPF female thread</u></p> <p>G 1/4</p>	<p><u>Technology</u></p> <p>"One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u></p> <p>2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u></p> <p>833 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u></p> <p>6 mm</p>	<p><u>Temperature</u></p> <p>-15°C to +70°C</p>	<p><u>Construction</u></p> <p>Composite body</p>	<p><u>Highlight</u></p> <p>Anti-static Non scratch</p>

Description	
Reference	BSPF female thread
ISI 061101SW	G 1/4
ISI 061102SW	G 3/8

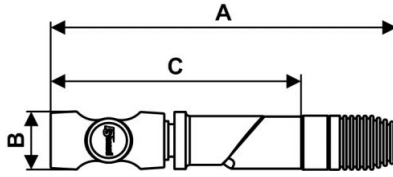

Dimensions

Reference	A mm	B mm	C mm
ISI 061101SW	172	30	125.3
ISI 061102SW	172	30	125.3