

thread swivel coupler



BSPF female thread

G 1/4

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

833 l/min ($\Delta P = 0,6$ bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch

Description

Reference


BSPF female thread

ISI 061101SW

G 1/4

ISI 061102SW

G 3/8

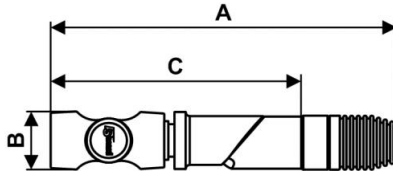

Dimensions

Reference	A mm	B mm	C mm
ISI 061101SW	172	30	125.3
ISI 061102SW	172	30	125.3