


## thread swivel coupler



<p><b><u>BSPF female thread</u></b></p> <p>G 1/4</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b></p> <p>2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b></p> <p>833 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b></p> <p>6 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>	<p><b><u>Construction</u></b></p> <p>Composite body</p>	<p><b><u>Highlight</u></b></p> <p>Anti-static Non scratch</p>

Description	
Reference	BSPF female thread
<b>ISI 061101SW</b>	G 1/4
<b>ISI 061102SW</b>	G 3/8

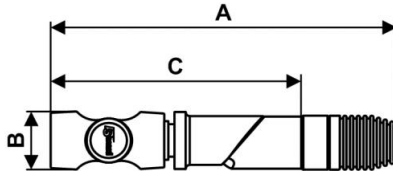

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 061101SW</b>	172	30	125.3
<b>ISI 061102SW</b>	172	30	125.3