

## Refrigeration dryers with By-pass hose, flexible hose and micron filter




<b><u>Inlet</u></b> G 3/8 F	<b><u>Outlet</u></b> R 1/2 M	<b><u>Flow rate</u></b> 24	<b><u>Operating pressure</u></b> 4 to 12 bar
<b><u>Temperature</u></b> +4,4°C to +43°C	<b><u>Supply voltage</u></b> 230 V - 50 HZ	<b><u>Dewpoint</u></b> + 3°C	

### Description

Reference	Inlet	Outlet	Flow rate
<b>DRY LM24</b>	G 3/8 F	R 1/2 M	24
<b>DRY LM54</b>	G 3/8 F	R 1/2 M	54

Reference	Inlet	Outlet	Flow rate
<b>DRY LM72</b>	G 1/2 F	G 1 F	72
<b>DRY LM108</b>	G 3/4 F	G 1 F	108
<b>DRY LM138</b>	G 3/4 F	G 1 F	138
<b>DRY LM180</b>	G 1 F	G 1 F	180

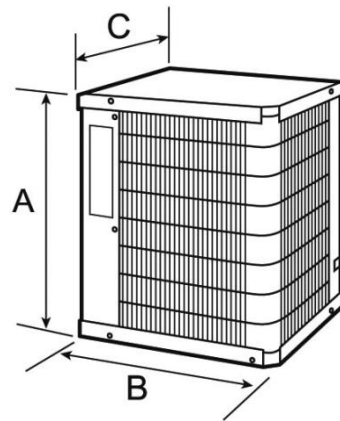

### Dimensions

Reference	A mm	B mm	C mm
<b>DRY LM24</b>	439	423	331
<b>DRY LM54</b>	439	423	331
<b>DRY LM72</b>	491	450	351
<b>DRY LM108</b>	491	450	351
<b>DRY LM138</b>	491	450	351
<b>DRY LM180</b>	548	594	451