


Refrigeration dryers with By-pass hose, flexible hose and micron filter



<u>Inlet</u> G 3/8 F	<u>Outlet</u> R 1/2 M	<u>Flow rate</u> 24	<u>Operating pressure</u> 4 to 12 bar
<u>Temperature</u> +4,4°C to +43°C	<u>Supply voltage</u> 230 V - 50 HZ	<u>Dewpoint</u> + 3°C	

Description			
Reference	Inlet	Outlet	Flow rate
DRY LM24	G 3/8 F	R 1/2 M	24
DRY LM54	G 3/8 F	R 1/2 M	54

Reference	Inlet	Outlet	Flow rate
DRY LM72	G 1/2 F	G 1 F	72
DRY LM108	G 3/4 F	G 1 F	108
DRY LM138	G 3/4 F	G 1 F	138
DRY LM180	G 1 F	G 1 F	180

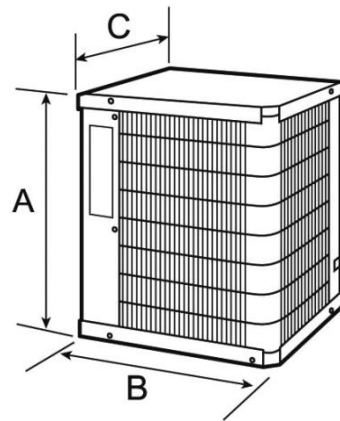

Dimensions

Reference	A mm	B mm	C mm
DRY LM24	439	423	331
DRY LM54	439	423	331
DRY LM72	491	450	351
DRY LM108	491	450	351
DRY LM138	491	450	351
DRY LM180	548	594	451