

Refrigeration dryers



BSPF female thread

G 1/2

Flow rate

24

Operating pressure

3 to 16 bar

Temperature

+4,4°C to +43°C

Supply voltage

230 V - 50 HZ


Dewpoint

+ 3°C

Description

Reference	BSPF female thread	Flow rate
DRY 24	G 1/2	24
DRY 54	G 1/2	54
DRY 72	G 1	72
DRY 108	G 1	108
DRY 138	G 1	138

Reference	BSPF female thread	Flow rate
DRY 180	G 1	180

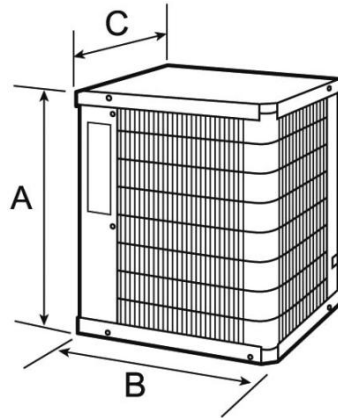

Dimensions

Reference	A mm	B mm	C mm
DRY 24	439	423	331
DRY 54	439	423	331
DRY 72	491	450	351
DRY 108	491	450	351
DRY 138	491	450	351
DRY 180	548	594	451