


## PVR 3UN - PVC 3-piece female - female union



<p><u>For pipe OD (mm)</u></p> <p>20</p>	<p><u>Max operating pressure</u></p> <p>13 bar at 23°C 7 bar at 50°C</p>	<p><u>Vacuum capability</u></p> <p>-0.98 bar (vacuum 98%)</p>	<p><u>Temperature</u></p> <p>-20°C to +50°C</p>
<p><u>Construction</u></p> <p>Pipe and fittings: PVC</p>	<p><u>Meets standards</u></p> <p>PED REACH</p>		

Description	
Reference	For pipe OD (mm)
PVR 3UN20	20
PVR 3UN25	25
PVR 3UN32	32
PVR 3UN40	40
PVR 3UN50	50
PVR 3UN63	63

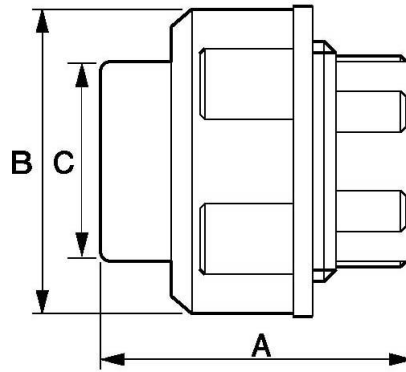

### Dimensions

Reference	A mm	B mm	C mm
<b>PVR 3UN20</b>	45	27.5	27.5
<b>PVR 3UN25</b>	51	34	34.5
<b>PVR 3UN32</b>	57	41	41.5
<b>PVR 3UN40</b>	67	51	51.5
<b>PVR 3UN50</b>	79	59	59
<b>PVR 3UN63</b>	98	96	74