


PVR 4CE- PVC equal female 45° elbow



| | | | |
|---|---|--|--|
| <p><u>For pipe OD (mm)</u></p> <p>20</p> | <p><u>Max operating pressure</u></p> <p>13 bar at 23°C 7 bar at 50°C</p> | <p><u>Vacuum capability</u></p> <p>-0.98 bar (vacuum 98%)</p> | <p><u>Temperature</u></p> <p>-20°C to +50°C</p> |
| <p><u>Construction</u></p> <p>Pipe and fittings: PVC</p> | <p><u>Meets standards</u></p> <p>PED REACH</p> | | |

| Description | |
|-------------|------------------|
| Reference | For pipe OD (mm) |
| PVR 4CE20 | 20 |
| PVR 4CE25 | 25 |
| PVR 4CE32 | 32 |
| PVR 4CE40 | 40 |
| PVR 4CE50 | 50 |
| PVR 4CE63 | 63 |

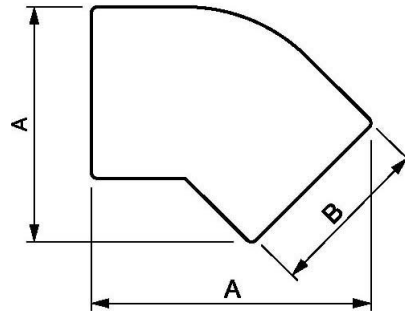

Dimensions

| Reference | A mm | B mm |
|------------------|------|------|
| PVR 4CE20 | 48 | 28 |
| PVR 4CE25 | 54 | 34 |
| PVR 4CE32 | 65 | 42 |
| PVR 4CE40 | 76 | 51 |
| PVR 4CE50 | 92 | 61 |
| PVR 4CE63 | 114 | 75 |