

PVR RFT - PVC Straight female thread connector



For pipe OD (mm)

20

BSPP female thread

G 1/2

Max operating pressure

13 bar at 23°C 7 bar at 50°C

Vacuum capability

-0.98 bar (vacuum 98%)

Temperature

-20°C to +50°C

Construction


Pipe and fittings: PVC

Meets standards

PED REACH

Description

Reference	For pipe OD (mm)	BSPP female thread
PVR RFT2012	20	G 1/2
PVR RFT2527	25	G 3/4
PVR RFT3234	32	G 1

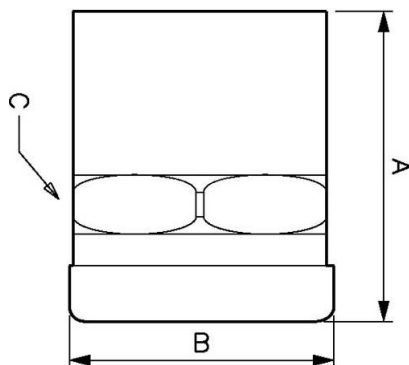

Dimensions			
Reference	A mm	B mm	C mm
PVR RFT2012	35	28	27.5
PVR RFT2527	42	34	33.5
PVR RFT3234	48	42	42