


PVR RMT - PVC Straight female thread fitting



<u>Fitting ID (mm)</u> 20	<u>BSPP female thread</u> G 1/2	<u>Max operating pressure</u> 13 bar at 23°C 7 bar at 50°C	<u>Vacuum capability</u> -0.98 bar (vacuum 98%)
<u>Temperature</u> -20°C to +50°C	<u>Construction</u> Pipe and fittings: PVC	<u>Meets standards</u> PED REACH	

Description		
Reference	Fitting ID (mm)	BSPP female thread
PVR RMT2012	20	G 1/2
PVR RMT2527	25	G 3/4

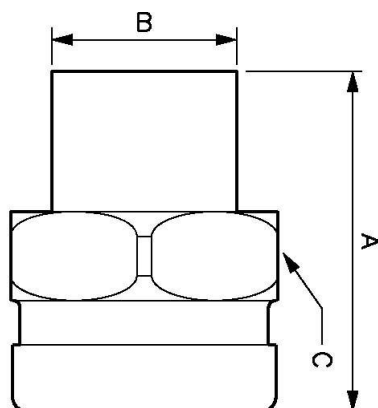

Dimensions			
Reference	A mm	B mm	C mm
PVR RMT2012	40.5	20	30
PVR RMT2527	45	25	36