


PVR RDS - PVC Reducer tube / fittings



<u>OD (mm)</u> 25	<u>ID (mm)</u> 20	<u>Max operating pressure</u> 13 bar at 23°C 7 bar at 50°C	<u>Vacuum capability</u> -0.98 bar (vacuum 98%)
<u>Temperature</u> -20°C to +50°C	<u>Construction</u> Pipe and fittings: PVC	<u>Meets standards</u> PED REACH	

Description		
Reference	OD (mm)	ID (mm)
PVR RDS2520	25	20
PVR RDS3225	32	25
PVR RDS4032	40	32
PVR RDS5040	50	40
PVR RDS6350	63	50

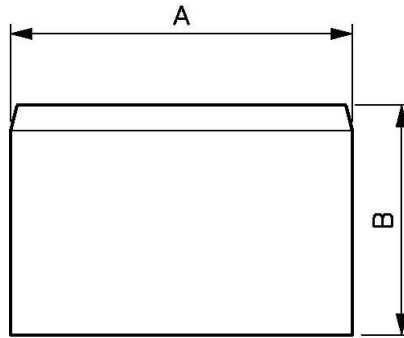

Dimensions

Reference	A mm	B mm
PVR RDS2520	25	19
PVR RDS3225	32	22
PVR RDS4032	40	26
PVR RDS5040	50	31
PVR RDS6350	63	38