


ALTO MAX regulator



BSPP female thread (1) G 1 1/4	Flow rate (l/min at 7 bar ΔP : 0.33bar) 10000	Operating pressure (bar) Inlet: 21 Outlet: 0-9	Temperature 0°C to +70°C
Construction ZAMAK alloy	Filtration 40 μ m	Equipped with Manual drain	

Description			
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 0.33bar)	Operating pressure (bar)

TX RG42	(1) G 1 1/4	10000	Inlet: 21 Outlet: 0-9
TX RG49	(1) G 1 1/2	12000	Inlet: 21 Outlet: 0-9
TX RG60	(2) G 2	42000	Inlet: 21 Outlet: 0-9
TX RG76	(2) G 2 1/2	44000	Inlet: 21 Outlet: 0-9

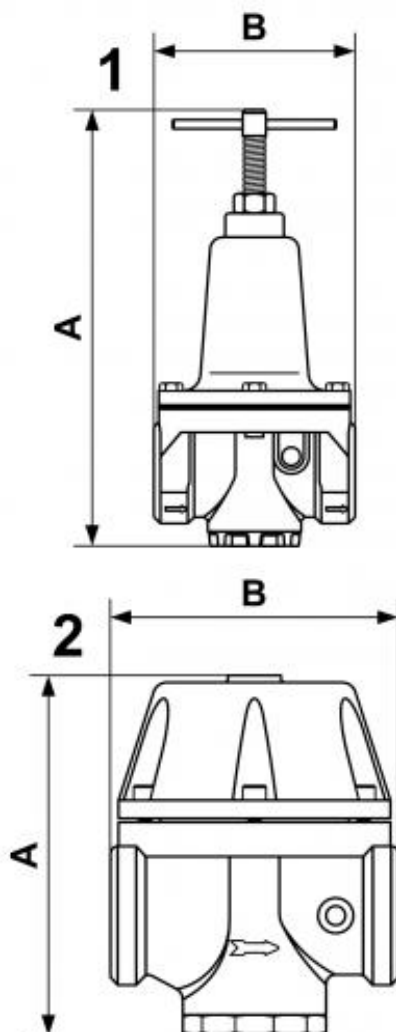

Dimensions

Reference	A mm	B mm
TX RG42	273	127
TX RG49	273	127
TX RG60	225	180
TX RG76	225	180