

## Split clamps 9 mm band



### Ø min./max. (mm)

10 - 16

### Tightening screw (Nm)

3

### Band width (mm)

8

### Packaging (Box quantity)

100


### Construction

Treated zinc-plated steel

## Description

Reference	Ø min./max. (mm)	Tightening screw (Nm)	Band width (mm)	Packaging (Box quantity)
<b>PBJ9 1016</b>	10 - 16	3	8	100
<b>PBJ9 1222</b>	14 - 24	3	8	100
<b>PBJ9 1627</b>	18 - 28	3	8	50
<b>PBJ9 2335</b>	24 - 36	3	8	50
<b>PBJ9 3045</b>	25 - 45	3	8	25

Reference	Ø min./max. (mm)	Tightening screw (Nm)	Band width (mm)	Packaging (Box quantity)
<b>PBJ9 3250</b>	32 - 52	3	8	25
<b>PBJ9 5070</b>	47 - 67	4	8	25
<b>PBJ9 7090</b>	77 - 97	4	8	10

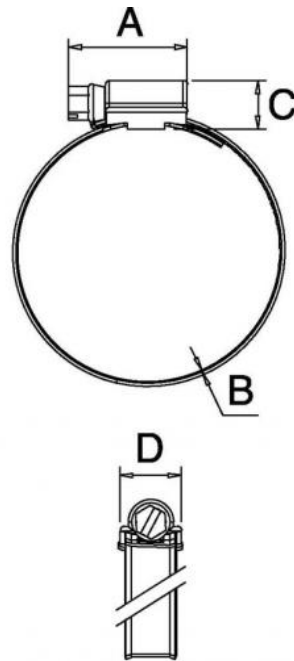

### Dimensions

Reference	A mm	B mm	C mm	D mm
<b>PBJ9 1016</b>	18	0.7	8.7	12
<b>PBJ9 1222</b>	18	0.7	8.7	12
<b>PBJ9 1627</b>	18	0.7	8.7	12
<b>PBJ9 2335</b>	18	0.7	8.7	12
<b>PBJ9 3045</b>	18	0.7	8.7	12
<b>PBJ9 3250</b>	18	0.7	8.7	12
<b>PBJ9 5070</b>	18	0.7	8.7	12
<b>PBJ9 7090</b>	18	0.7	8.7	12