

Straight hydraulic stud fittings - High Pressure - HBB



BSPB male thread

G 1/8

Max operating

pressure

440

Temperature

-40°C to +100°C


Construction

Steel

Description

Reference	BSPB male thread	Max operating pressure
HBB 1818	G 1/8	440
HBB 1814	G 1/8	420
HBB 1414	G 1/4	420
HBB 1438	G 1/4	350
HBB 3838	G 3/8	350
HBB 3812	G 3/8	310
HBB 1212	G 1/2	310
HBB 1234	G 1/2	250

Reference	BSPB male thread	Max operating pressure
HBB 5858	G 5/8	250
HBB 3434	G 3/4	250
HBB 3401	G 3/4	200
HBB 0101	G 1	200

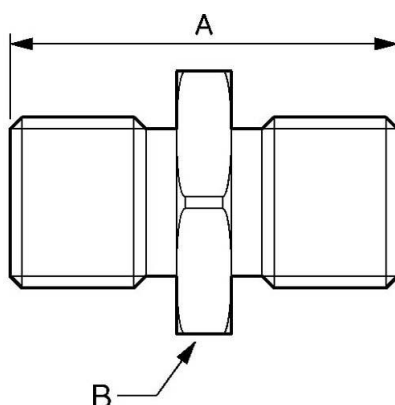

Dimensions		
Reference	A mm	B mm
HBB 1818	26	13
HBB 1814	28	14
HBB 1414	30	14
HBB 1438	32	17
HBB 3838	34	17
HBB 3812	38	22
HBB 1212	40	22
HBB 1234	43	27
HBB 5858	42	24
HBB 3434	45	27
HBB 3401	48	36
HBB 0101	50	36