


## ISO A-Series hydraulic coupler



<p><b><u>Female thread</u></b></p> <p>G 1/4</p>	<p><b><u>Nominal Ø (mm)</u></b></p> <p>6</p>	<p><b><u>Flow rate (nominal in l/min)</u></b></p> <p>12</p>	<p><b><u>Max operating pressure (bar)</u></b></p> <p>350</p>
<p><b><u>Technology</u></b></p> <p>Ball lock</p>	<p><b><u>Temperature</u></b></p> <p>-25°C to +100°C</p>	<p><b><u>Construction</u></b></p> <p>Body: steel</p>	<p><b><u>Applications</u></b></p> <p>Agricultural</p>
<p><b><u>Connection</u></b></p> <p>Semi-automatic</p>			

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCA 061101</b>	G 1/4	6	12	350
<b>HCA 101102</b>	G 3/8	10	23	350
<b>HCA 131103</b>	G 1/2	13	45	250

Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCA 131221</b>	M22 x 1.5	13	45	250
<b>HCA 201104</b>	G 3/4	20	106	250
<b>HCA 251105</b>	G 1	25	189	200

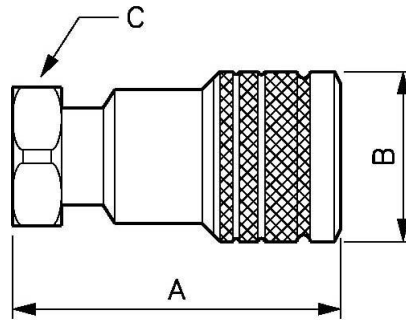

### Dimensions

Reference	A mm	B mm	C mm
<b>HCA 061101</b>	49.2	26	19
<b>HCA 101102</b>	60.5	30	22
<b>HCA 131103</b>	84.3	38	27
<b>HCA 131221</b>	70	38	27
<b>HCA 201104</b>	84.3	45	34
<b>HCA 251105</b>	101	52	41