


## ISO A-Series hydraulic coupler



<u>Female thread</u> G 1/4	<u>Nominal Ø (mm)</u> 6	<u>Flow rate (nominal in l/min)</u> 12	<u>Max operating pressure (bar)</u> 350
<u>Technology</u> Ball lock	<u>Temperature</u> -25°C to +100°C	<u>Construction</u> Body: steel	<u>Applications</u> Agricultural
<u>Connection</u> Semi-automatic			

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCA 061101</b>	G 1/4	6	12	350
<b>HCA 101102</b>	G 3/8	10	23	350
<b>HCA 131103</b>	G 1/2	13	45	250

Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HCA 131221</b>	M22 x 1.5	13	45	250
<b>HCA 201104</b>	G 3/4	20	106	250
<b>HCA 251105</b>	G 1	25	189	200

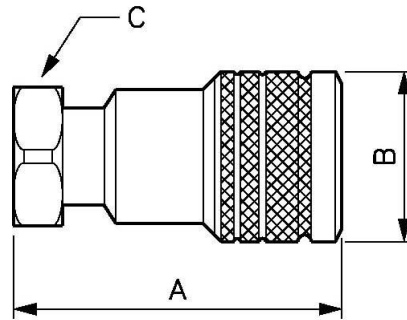

### Dimensions

Reference	A mm	B mm	C mm
<b>HCA 061101</b>	49.2	26	19
<b>HCA 101102</b>	60.5	30	22
<b>HCA 131103</b>	84.3	38	27
<b>HCA 131221</b>	70	38	27
<b>HCA 201104</b>	84.3	45	34
<b>HCA 251105</b>	101	52	41