


DLO series - Steel with thermoplastic hose - Food grade



<p><u>ID/OD (mm)</u> 16 x 24</p>	<p><u>Length (m)</u> 25</p>	<p><u>Coupler</u> ELS 09</p>	<p><u>Swivel inlet BSPP male thread</u> G 1/2</p>
<p><u>Weight (kg)</u> 44</p>	<p><u>Technology</u> Pipe locked with ratchet stop</p>	<p><u>Max operating pressure</u> 10 bar</p>	<p><u>Temperature</u> -15°C to +60°C</p>
<p><u>Construction</u> Epoxy-coated steel case</p>	<p><u>Connection</u> 1 m of inlet supply hose</p>	<p><u>Equipped with</u> Fixed bracket</p>	

Description

Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPP male thread	Weight (kg)
DLO 1625LS	16 x 24	25	ELS 09	G 1/2	44
DLO 1920LS	19 x 28	20	ELS 09	G 1	42

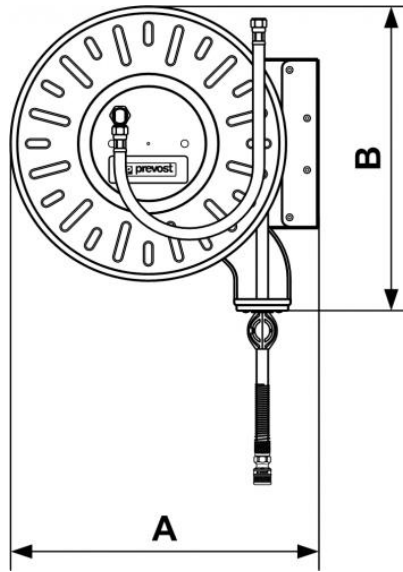

Dimensions

Reference	A mm	B mm
DLO 1625LS	615	610
DLO 1920LS	615	610