


## DLOI series - 304 Stainless steel with thermoplastic hose - Food grade



<p><u>ID/OD (mm)</u></p> <p>16 x 24</p>	<p><u>Length (m)</u></p> <p>25</p>	<p><u>Coupler</u></p> <p>ELS 09</p>	<p><u>Swivel inlet BSPP male thread</u></p> <p>G 1/2</p>
<p><u>Weight (kg)</u></p> <p>44</p>	<p><u>Technology</u></p> <p>Pipe locked with ratchet stop</p>	<p><u>Max operating pressure</u></p> <p>10 bar</p>	<p><u>Temperature</u></p> <p>-15°C to +60°C</p>
<p><u>Construction</u></p> <p>AISI 304 stainless steel case</p>	<p><u>Connection</u></p> <p>1 m of inlet supply hose</p>	<p><u>Equipped with</u></p> <p>Fixed bracket</p>	

### Description

Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPP male thread	Weight (kg)
<b>DLOI 1625LS</b>	16 x 24	25	ELS 09	G 1/2	44
<b>DLOI 1920LS</b>	19 x 28	20	ELS 09	G 1	42

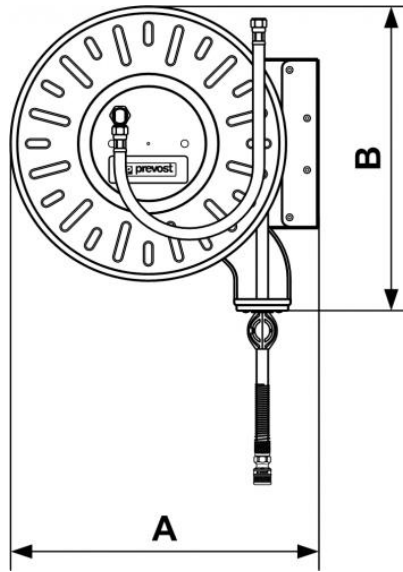

### Dimensions

Reference	A mm	B mm
<b>DLOI 1625LS</b>	624	610
<b>DLOI 1920LS</b>	624	610