

Y connector with built-in shutoff



BSPP female thread

G 1/2

Operating pressure

0 to 10 bar

Flow rate

24 l/min (ΔP : 0,3 bar with shutter), 33,5 l/min (ΔP : 0,3 bar without shutter)

ID Passage

9 mm

Temperature


-15°C to +60°C

Construction

Chrome-plated brass body

Description

| Reference | BSPP female thread |
|-------------------|--------------------|
| ELP 098103 | G 1/2 |
| ELP 098104 | G 3/4 |

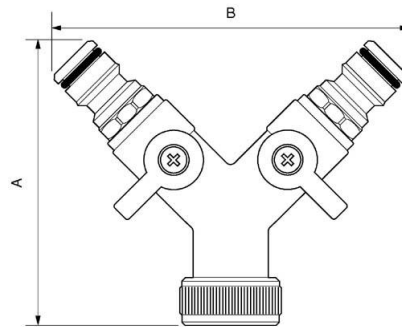

Dimensions

| Reference | A mm | B mm |
|-------------------|------|------|
| ELP 098103 | 90 | 103 |
| ELP 098104 | 90 | 103 |