

## Parallel male thread coupler - Stainless Steel



### BSPB male thread

G 1/4

### Technology

Push button

### Operating pressure

0 to 12 bar

### Flow rate at 6 bar

800 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction

Composite body Stainless  
steel valve

### Applications

Corrosive atmospheres

### Highlight

Non scratch

## Description

Reference

BSPB male thread

**PROXI 061151**


G 1/4

**PROXI 061152**

G 3/8

**PROXI 061153**

G 1/2

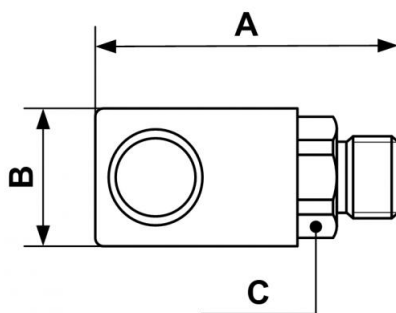

| Dimensions          |      |      |      |
|---------------------|------|------|------|
| Reference           | A mm | B mm | C mm |
| <b>PROXI 061151</b> | 62   | 28   | 23   |
| <b>PROXI 061152</b> | 62   | 28   | 23   |
| <b>PROXI 061153</b> | 64   | 28   | 23   |