


## Polyurethane recoils with rigid male fittings

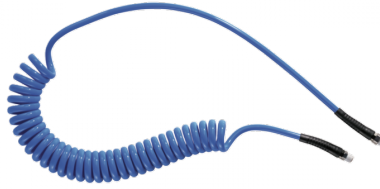

Blue.

PUS 68FF, PUS 88FF: teflon-coated coupler.

<u>BSPT male thread</u> R 1/2	<u>ID/OD (mm)</u> 11 x 16	<u>Coil Ø (mm)</u> 90	<u>Max length (m)</u> 4
<u>Min. length (m)</u> 0.4	<u>Max operating pressure</u> 8 bar	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Polyurethane
<u>Highlight</u> Non scratch			

Description					
Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)
<b>PUS 114</b>	R 1/2	11 x 16	90	4	0.4
<b>PUS 118</b>	R 1/2	11 x 16	90	8	0.8

