


## Polyurethane recoils with rigid male fittings

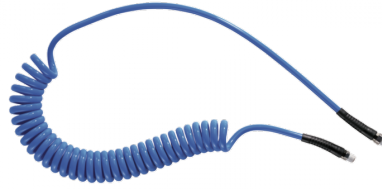

Blue.

PUS 68FF, PUS 88FF: teflon-coated coupler.

|   |   |   |  |
|---|---|---|--|
| <b><u>BSPT male thread</u></b><br>R 1/2 | <b><u>ID/OD (mm)</u></b><br>11 x 16           | <b><u>Coil Ø (mm)</u></b><br>90             | <b><u>Max length (m)</u></b><br>4          |
| <b><u>Min. length (m)</u></b><br>0.4    | <b><u>Max operating pressure</u></b><br>8 bar | <b><u>Temperature</u></b><br>-15°C to +70°C | <b><u>Construction</u></b><br>Polyurethane |
| <b><u>Highlight</u></b><br>Non scratch  |   |   |  |

| Description    |                  |            |             |                |                 |
|----------------|------------------|------------|-------------|----------------|-----------------|
| Reference      | BSPT male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) |
| <b>PUS 114</b> | R 1/2            | 11 x 16    | 90          | 4              | 0.4             |
| <b>PUS 118</b> | R 1/2            | 11 x 16    | 90          | 8              | 0.8             |

