


## Polyurethane recoils with rigid and swiveling male fittings

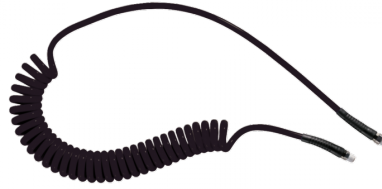

Black.

Teflon-coated coupler.

|   |   |   |  |
|---|---|---|--|
| <b><u>BSPT male thread</u></b><br>R 1/4 | <b><u>ID/OD (mm)</u></b><br>6.5 x 10          | <b><u>Coil Ø (mm)</u></b><br>42             | <b><u>Max length (m)</u></b><br>4          |
| <b><u>Min. length (m)</u></b><br>0.4    | <b><u>Max operating pressure</u></b><br>8 bar | <b><u>Temperature</u></b><br>-15°C to +70°C | <b><u>Construction</u></b><br>Polyurethane |
| <b><u>Highlight</u></b><br>Non scratch  |   |   |  |

| Description     |                  |            |             |                |                 |
|-----------------|------------------|------------|-------------|----------------|-----------------|
| Reference       | BSPT male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) |
| <b>PUS 64NR</b> | R 1/4            | 6.5 x 10   | 42          | 4              | 0.4             |
| <b>PUS 66NR</b> | R 1/4            | 6.5 x 10   | 52          | 6              | 0.63            |

