


## Polyamide recoils with straight ends and rigid male fittings

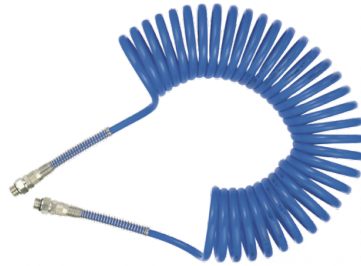

<p><b><u>BSPG male thread</u></b> G 1/4</p>	<p><b><u>ID/OD (mm)</u></b> 6.5 x 8</p>	<p><b><u>Coil Ø (mm)</u></b> 78</p>	<p><b><u>Max length (m)</u></b> 5</p>
<p><b><u>Min. length (m)</u></b> 0.6</p>	<p><b><u>Max operating pressure</u></b> 10 bar</p>	<p><b><u>Temperature</u></b> -20°C to +90°C</p>	<p><b><u>Construction</u></b> Polyamide PA 12</p>
<p><b><u>Highlight</u></b> Highly resistant to chemicals</p>			

Description					
Reference	BSPG male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)
<b>SPI 95</b>	G 1/4	6.5 x 8	78	5	0.6

## Dimensions

Reference

**SPI 95**