


Polyamide recoils with straight ends and rigid male fittings

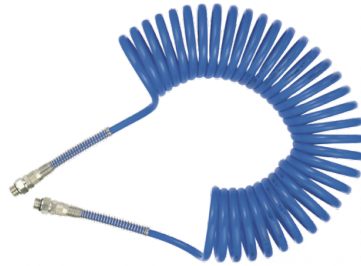

| | | | |
|---|---|--|--|
| <p><u>BSPG male thread</u></p> <p>G 1/4</p> | <p><u>ID/OD (mm)</u></p> <p>6.5 x 8</p> | <p><u>Coil Ø (mm)</u></p> <p>78</p> | <p><u>Max length (m)</u></p> <p>5</p> |
| <p><u>Min. length (m)</u></p> <p>0.6</p> | <p><u>Max operating pressure</u></p> <p>10 bar</p> | <p><u>Temperature</u></p> <p>-20°C to +90°C</p> | <p><u>Construction</u></p> <p>Polyamide PA 12</p> |
| <p><u>Highlight</u></p> <p>Highly resistant to chemicals</p> | | | |

| Description | | | | | |
|---------------|------------------|------------|-------------|----------------|-----------------|
| Reference | BSPG male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) |
| SPI 95 | G 1/4 | 6.5 x 8 | 78 | 5 | 0.6 |

Dimensions

Reference

SPI 95