


Polyamide recoils with straight ends and rigid male fittings

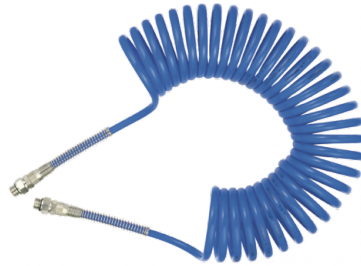

<u>BSPB male thread</u> G 1/4	<u>ID/OD (mm)</u> 6.5 x 8	<u>Coil Ø (mm)</u> 78	<u>Max length (m)</u> 5
<u>Min. length (m)</u> 0.6	<u>Max operating pressure</u> 10 bar	<u>Temperature</u> -20°C to +90°C	<u>Construction</u> Polyamide PA 12
<u>Highlight</u> Highly resistant to chemicals			

Description					
Reference	BSPB male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)
SPI 95	G 1/4	6.5 x 8	78	5	0.6

Dimensions

Reference

SPI 95