


Polyamide recoils with straight ends and rigid male fittings

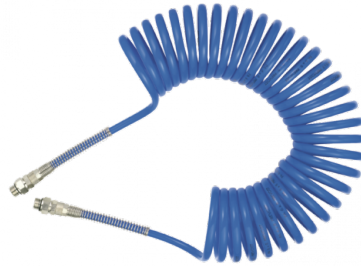

<p><u>BSPG male thread</u></p> <p>G 1/4</p>	<p><u>ID/OD (mm)</u></p> <p>6.5 x 8</p>	<p><u>Coil Ø (mm)</u></p> <p>78</p>	<p><u>Max length (m)</u></p> <p>5</p>
<p><u>Min. length (m)</u></p> <p>0.6</p>	<p><u>Max operating pressure</u></p> <p>10 bar</p>	<p><u>Temperature</u></p> <p>-20°C to +90°C</p>	<p><u>Construction</u></p> <p>Polyamide PA 12</p>
<p><u>Highlight</u></p> <p>Highly resistant to chemicals</p>			

Description					
Reference	BSPG male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)
SPI 95	G 1/4	6.5 x 8	78	5	0.6

Dimensions

Reference

SPI 95