


## A series: 0.4-3 kg load capacity



<u>Length (cable (m))</u> 1.6	<u>Min.Load (kg)</u> 0.4	<u>Max.load (kg)</u> 1	<u>Weight (kg)</u> 0.57
<u>Temperature</u> +5°C to +60°C	<u>Construction</u> Body : Aluminium Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

Description				
Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
<b>BAL 0410A</b>	1.6	0.4	1	0.57

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
<b>BAL 1020A</b>	1.6	1	2	0.60
<b>BAL 2030A</b>	1.6	2	3	0.74

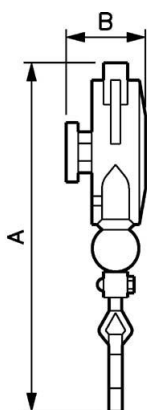

### Dimensions

Reference	A mm	B mm
<b>BAL 0410A</b>	282	55
<b>BAL 1020A</b>	282	55
<b>BAL 2030A</b>	282	55