


B series: 2-8 kg load capacity



<u>Length (cable (m))</u> 2	<u>Min.Load (kg)</u> 2	<u>Max.load (kg)</u> 4	<u>Weight (kg)</u> 1.90
<u>Temperature</u> +5°C to +60°C	<u>Construction</u> Body : Aluminium Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

Description				
Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 2040B	2	2	4	1.90
BAL 4060B	2	4	6	1.98

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 6080B	2	6	8	2.28

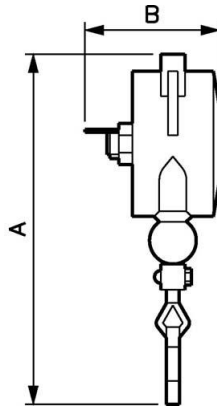

Dimensions

Reference	A mm	B mm
BAL 2040B	353	88
BAL 4060B	353	88
BAL 6080B	353	88