


## F Series: 25-105 kg load capacity



<u>Length (cable (m))</u> 2	<u>Min.Load (kg)</u> 25	<u>Max.load (kg)</u> 30	<u>Weight (kg)</u> 11.3
<u>Temperature</u> +5°C to +60°C	<u>Construction</u> Body : Aluminium Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

### Description

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 250300F	2	25	30	11.3
BAL 300350F	2	30	35	11.3
BAL 350450F	2	35	45	12.21
BAL 450550F	2	45	55	12.21
BAL 550650F	2	55	65	13.06
BAL 650750F	2	65	75	13.86
BAL 750900F	2	75	90	16.84
BAL 9001050F	2	90	105	17.77

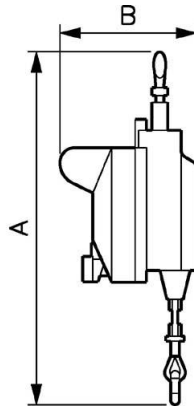

## Dimensions

Reference	A mm	B mm
<b>BAL 250300F</b>	636	220
<b>BAL 300350F</b>	636	220
<b>BAL 350450F</b>	636	220
<b>BAL 450550F</b>	636	220
<b>BAL 550650F</b>	636	220
<b>BAL 650750F</b>	636	220
<b>BAL 750900F</b>	636	220
<b>BAL 9001050F</b>	636	220