


F Series: 25-105 kg load capacity



<u>Length (cable (m))</u> 2	<u>Min.Load (kg)</u> 25	<u>Max.load (kg)</u> 30	<u>Weight (kg)</u> 11.3
<u>Temperature</u> +5°C to +60°C	<u>Construction</u> Body : Aluminium Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

Description

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 250300F	2	25	30	11.3
BAL 300350F	2	30	35	11.3
BAL 350450F	2	35	45	12.21
BAL 450550F	2	45	55	12.21
BAL 550650F	2	55	65	13.06
BAL 650750F	2	65	75	13.86
BAL 750900F	2	75	90	16.84
BAL 9001050F	2	90	105	17.77

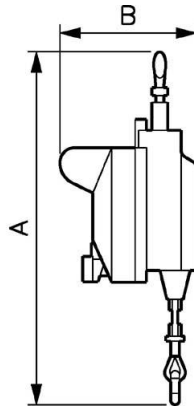

Dimensions

Reference	A mm	B mm
BAL 250300F	636	220
BAL 300350F	636	220
BAL 350450F	636	220
BAL 450550F	636	220
BAL 550650F	636	220
BAL 650750F	636	220
BAL 750900F	636	220
BAL 9001050F	636	220