


DP series: 4-25 kg load capacity



<u>Length (cable (m))</u> 2	<u>Min.Load (kg)</u> 4	<u>Max.load (kg)</u> 7	<u>Weight (kg)</u> 4.94
<u>Temperature</u> +5°C to +60°C	<u>Construction</u> Body : Aluminium Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

Description				
Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 4070DP	2	4	7	4.94
BAL 70100DP	2	7	10	5.3
BAL 100140DP	2	10	14	5.67

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
BAL 140180DP	2	14	18	6.26
BAL 180220DP	2	18	22	5.89
BAL 220250DP	2	22	25	6.53

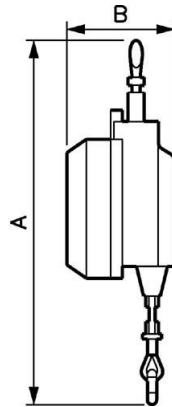

Dimensions

Reference	A mm	B mm
BAL 4070DP	551	140
BAL 70100DP	551	140
BAL 100140DP	551	140
BAL 140180DP	551	140
BAL 180220DP	551	140
BAL 220250DP	551	140