


## ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and quick connections



<b><u>BSPF female thread</u></b> G 1/4	<b><u>Flow rate (l/min at 7 bar ΔP : 1bar)</u></b> 500	<b><u>Max operating pressure (bar)</u></b> 12	<b><u>Filtration (μm)</u></b> 25
<b><u>Temperature</u></b> +5°C to +50 °C	<b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection	<b><u>Equipped with</u></b> Manual drain	

Description				
Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Max operating pressure (bar)	Filtration (μm)
<b>TB PSM1</b>	G 1/4	500	12	25

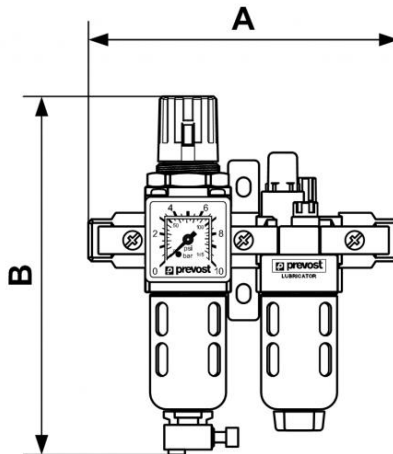

### Dimensions

Reference	A mm	B mm
<b>TB PSM1</b>	146	170