

## ALTO 2 - Filter 25 and 5 $\mu\text{m}$



### BSPP female thread

G 3/8

### Flow rate (l/min at 6 bar $\Delta P$ : 0.3bar)

2250

### Max operating pressure (bar)

12

### Filtration ( $\mu\text{m}$ )

25

### Temperature

+5°C to +50 °C

### Construction

Body : Aluminium  
Polycarbonate bowl with metallic protection


### Equipped with

Manual drain

## Description

Reference	BSPP female thread	Flow rate (l/min at 6 bar $\Delta P$ : 0.3bar)	Max operating pressure (bar)	Filtration ( $\mu\text{m}$ )
TF 2	G 3/8	2250	12	25

Reference	BSPP female thread	Flow rate (l/min at 6 bar &#916;P : 0.3bar)	Max operating pressure (bar)	Filtration ( $\mu$ m)
<b>TF 205</b>	G 3/8	2250	12	5

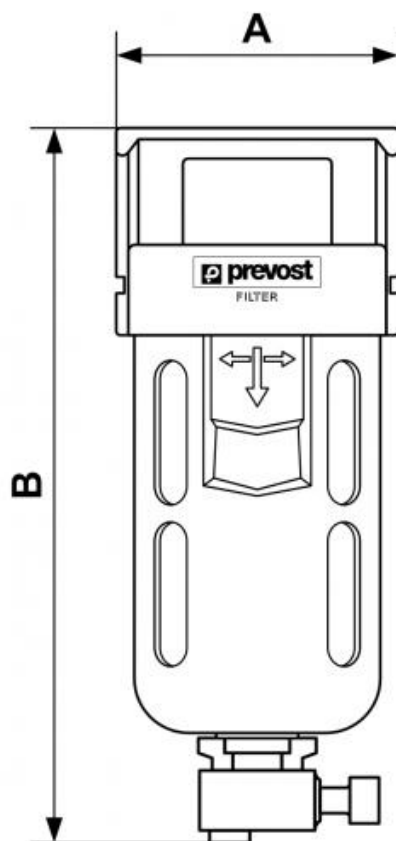

### Dimensions

Reference	A mm	B mm
TF 2	55	140
TF 205	55	140