


ALTO 3 - Filter 25 - 5 and 0.01 µm



<p><u>BSPP female thread</u> G 1/2</p>	<p><u>Flow rate (l/min at 6 bar ΔP : 0.3bar)</u> 3500</p>	<p><u>Max operating pressure (bar)</u> 12</p>	<p><u>Filtration (µm)</u> 25</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description				
Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (µm)
TF 3	G 1/2	3500	12	25

Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (μ m)
TF 305	G 1/2	3500	12	5
TC 3	G 1/2	1500	12	0.01

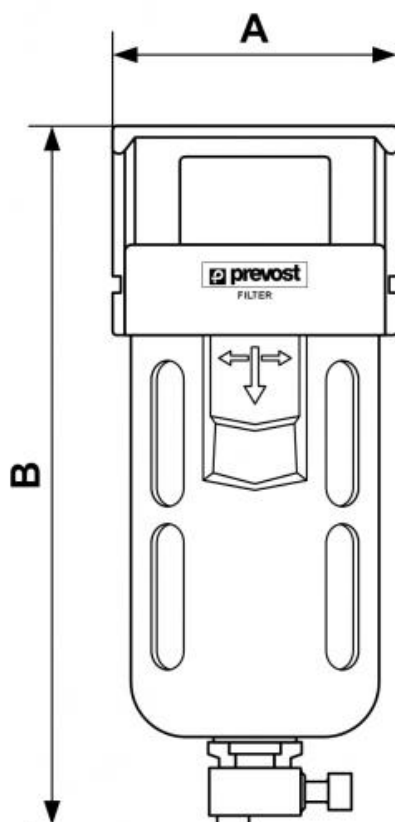

Dimensions

Reference	A mm	B mm
TF 3	70	172
TF 305	70	172
TC 3	70	172