

ALTO 3 - Lubricator



BSPP female thread

G 1/2

Flow rate (l/min at 6 bar ΔP : 0,5 bar)

5650

Max operating pressure (bar)

12

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0,5 bar)	Max operating pressure (bar)
TL 3	G 1/2	5650	12

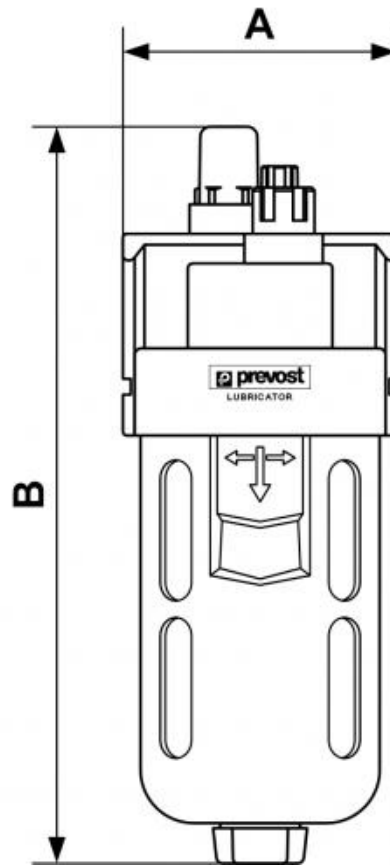

Dimensions

Reference	A mm	B mm
TL 3	70	190