


## ALTO 2 - Filter-regulator



<p><b><u>BSPP female thread</u></b> G 3/8</p>	<p><b><u>Flow rate (l/min at 7 bar ΔP : 1bar)</u></b> 1800</p>	<p><b><u>Operating pressure (bar)</u></b> Inlet: 12 Outlet: 0.5-10</p>	<p><b><u>Filtration (μm)</u></b> 25</p>
<p><b><u>Temperature</u></b> +5°C to +50 °C</p>	<p><b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><b><u>Equipped with</u></b> Manual drain</p>	

Description				
Reference	BSPP female thread	Flow rate (l/min at 7 bar &#916;P : 1bar)	Operating pressure (bar)	Filtration (μm)

<b>TM 2</b>	G 3/8	1800	Inlet: 12 Outlet: 0.5-10	25
<b>TM D2</b>	G 3/8	1800	Inlet: 12 Outlet: 0.5-10	25 With automatic drain

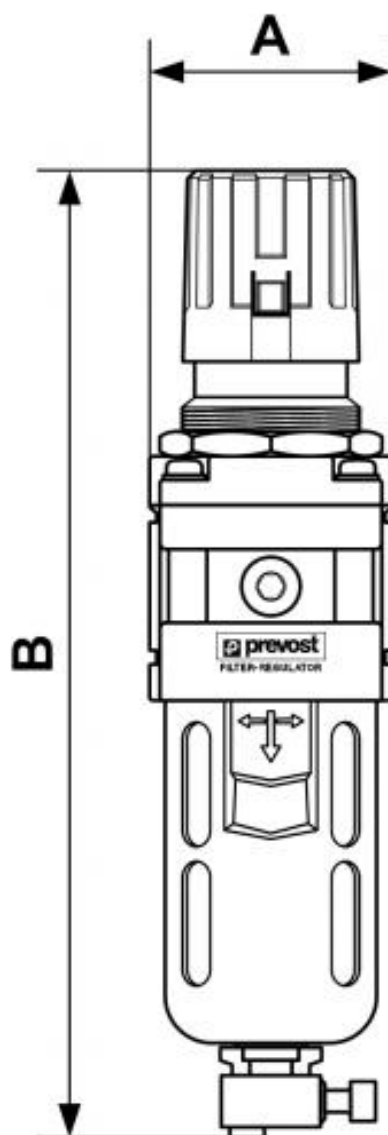

### Dimensions

Reference	A mm	B mm
<b>TM 2</b>	55	220
<b>TM D2</b>	55	270