


ALTO 3 - Filter-regulator



<p><u>BSPP female thread</u> G 1/2</p>	<p><u>Flow rate (l/min at 7 bar ΔP : 1bar)</u> 3000</p>	<p><u>Operating pressure (bar)</u> Inlet: 12 Outlet: 0.5-10</p>	<p><u>Filtration (µm)</u> 25</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description				
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)	Filtration (µm)
TM 3	G 1/2	3000	Inlet: 12 Outlet: 0.5-10	25

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)	Filtration (μm)
TM 305	G 1/2	3000	Inlet: 12 Outlet: 0.5-10	5
TM D3	G 1/2	3000	Inlet: 12 Outlet: 0.5-10	25 With automatic drain

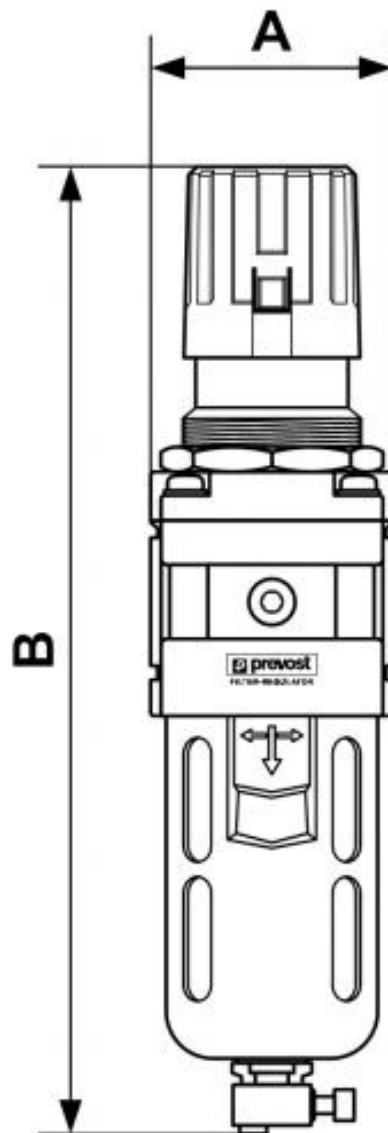

Dimensions

Reference	A mm	B mm
TM 3	70	280
TM 305	70	280
TM D3	70	330