

ALTO 1 - Regulator with Gauge



BSPP female thread

G 1/4

Flow rate (l/min at 7 bar Δ P

1 bar) = 600

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar Δ P	Operating pressure (bar)
TR M1	G 1/4	1bar) = 600	Inlet: 15 Outlet: 0.5-10

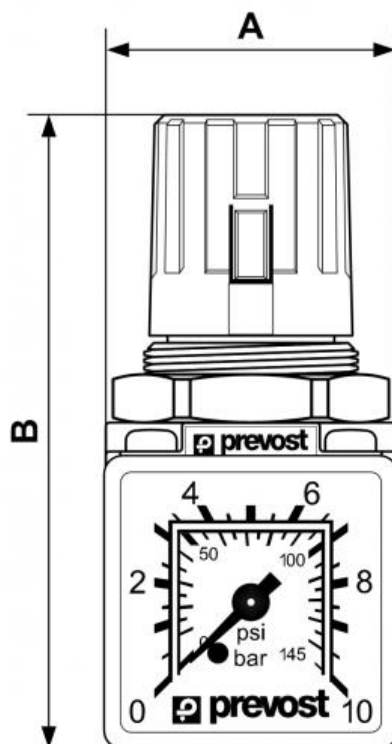

Dimensions

Reference	A mm	B mm
TR M1	40	81