

ALTO 2 - Regulator



BSPP female thread

G 3/8

Flow rate (l/min at 7 bar ΔP : 1bar)

2500

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)
TR 2	G 3/8	2500	Inlet: 15 Outlet: 0.5-10

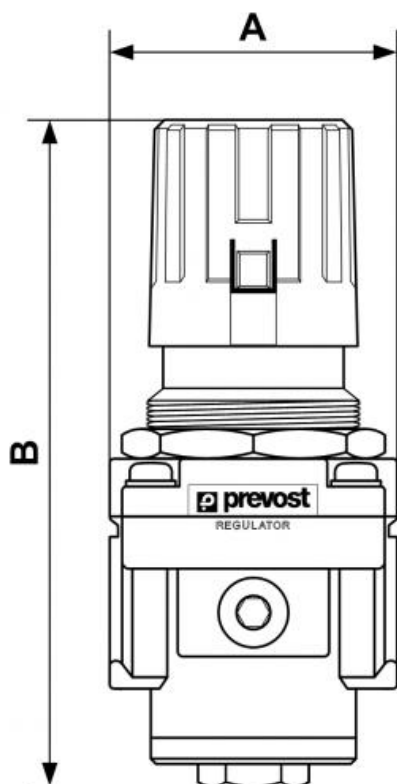

Dimensions

Reference	A mm	B mm
TR 2	55	135