


Hose tail coupler



<p><u>For hose ID (mm)</u> 8</p>	<p><u>Profile</u> Asian</p>	<p><u>Technology</u> Safety (avoid hose whip)</p>	<p><u>Operating pressure</u> 2 to 12 bar</p>
<p><u>Flow rate at 6 bar</u> 1966 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u> 8 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Composite body</p>
<p><u>Highlight</u> Non scratch</p>			

Description	
Reference	For hose ID (mm)
OSG 081808	8
OSG 081810	10

Reference	For hose ID (mm)
OSG 081813	13

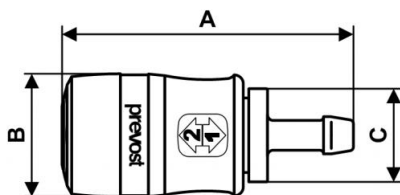

Dimensions

Reference	A mm	B mm	C mm
OSG 081808	72	33	27
OSG 081810	72	33	27
OSG 081813	77	33	27