

## ALTO 1 - 2-piece-set - Submicron assembly with regulator (gauge included) and wall bracket



**BSPF female thread**

G 1/4

**Flow rate (l/min at 6 bar ΔP : 0.3bar)**

250

**Max operating pressure (bar)**

12

**Filtration (µm)**

5 and 0.01

**Temperature**

+5°C to +50 °C

**Construction**


Body : Aluminium  
Polycarbonate bowl with metallic protection

**Equipped with**

Manual drain

### Description

Reference	BSPF female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (µm)
<b>TB CSM1</b>	G 1/4	250	12	5 and 0.01

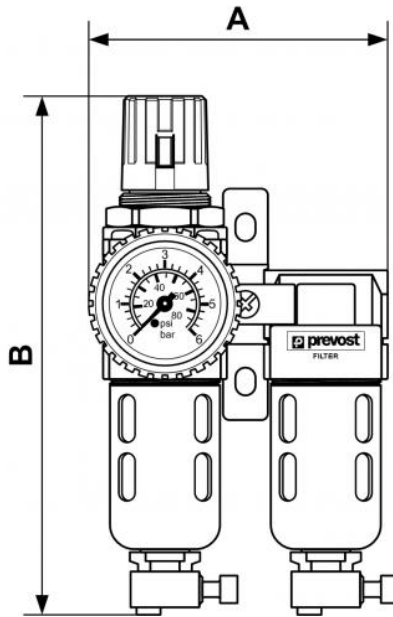

### Dimensions

Reference	A mm	B mm
<b>TB CSM1</b>	92	170